

# ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2

Owner of the Declaration	EJOT SE & Co. KG
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-EJO-20250496-IBC1-EN
Issue date	09/01/2026
Valid to	08/01/2031

**EJOT JC2 Plus / Sormat S-CSA+**  
**EJOT SE & Co. KG**

[www.ibu-epd.com](http://www.ibu-epd.com) | <https://epd-online.com>



## 1. General Information

### EJOT SE & Co. KG

#### Programme holder

IBU – Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

#### Declaration number

EPD-EJO-20250496-IBC1-EN

#### This declaration is based on the product category rules:

Screws, 01/06/2023  
(PCR checked and approved by the SVR)

#### Issue date

09/01/2026

#### Valid to

08/01/2031

### EJOT JC2 Plus / Sormat S-CSA+

#### Owner of the declaration

EJOT SE & Co. KG  
In der Stockwiese 35  
57334 Bad Laasphe  
Germany

#### Declared product / declared unit

1 kg of carbon steel concrete screws EJOT JC2 Plus / Sormat S-CSA+

#### Scope:

This EPD refers to 1 kg of concrete screws EJOT JC2 Plus / Sormat S-CSA+ made of galvanized or Multi Layer coated carbon steel manufactured at EJOT Sormat OY, Masku, Finland. It represents the weighted average of that product group.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of EN 15804+A2. In the following, the standard will be simplified as *EN 15804*.

#### Verification

The standard EN 15804 serves as the core PCR

Independent verification of the declaration and data according to ISO  
14025:2011

internally  externally



Dipl.-Ing. Hans Peters  
(Chairman of Institut Bauen und Umwelt e.V.)



Florian Pronold  
(Managing Director Institut Bauen und Umwelt e.V.)



Manfred Russ,  
(Independent verifier)

## 2. Product

### 2.1 Product description/Product definition

EJOT JC2 Plus and Sormat S-CSA+ concrete screws are anchors made of galvanized or Multi Layer coated carbon steel. As they are screwed into the base material, the special thread cuts an internal thread into the wall of the predrilled hole. These are removable and have low expansion forces due to the mechanical interlock between the screw threads and the base material. These make them particularly suitable for temporary fastenings near the edge and for use in pre-stressed hollow core slabs.

#### Application range

- > For embedment in cracked and non-cracked concrete
- > Dry internal conditions
- > For fixing medium to heavy fixtures
- > For pre-positioned and push-through installations

#### Head types (Examples)

JC2-KB Plus // S-CSA+ HEX:

Hexagonal head with combined washer/flange

JC2-ST Plus // S-CSA+ CS:

Countersunk head with TX-drive

JC2-FR Plus // S-CSA+ P:

Pan Head with TX-drive

JC2-IT Plus // S-CSA+ I:

Internal thread version with hexagonal drive

JC2-ET Plus // S-CSA+ E:

External thread version with hexagonal drive

For the placing of the product on the market in the European Union/European Free Trade Association /EU/EFTA) (except Switzerland) the *Regulation (EU) No. 305/2011 (CPR)* applies. The product needs a declaration of performance taking into consideration:

*ETA-20/0446 acc. to EAD 330232:*

*'Concrete screws for use in cracked and non-cracked concrete'*

*ETA-17/1009 acc. to EAD 330747:*

*'Concrete screws for multiple-use for non-structural application in concrete and in pre-stressed hollow core slabs'*

For the application and use the respective national provisions apply.

In Germany, the *'General construction technique permit AbG Z-21.8-2136 - Screw anchor for temporary fastening in concrete'* is additionally applicable.

### 2.2 Application

#### Anchorage subjected to:

- Static // quasi static
- Seismic load
- Fire exposure

#### Base materials:

- Cracked and non-cracked concrete
- Reinforced and unreinforced normal weight concrete according to *EN 206*
- Precast pre-stressed hollow core slabs

### 2.3 Technical Data

The technical performance of the concrete screws covered by this Environmental Product Declaration is assessed according to:

*EAD 330232: Mechanical fasteners for use in concrete* and

*EAD 330747: Fasteners for use in concrete for redundant non-structural systems*

The provisions of these EADs are based on an assumed working life of the concrete screws of 50 years.

Basic work requirements for:

*BWR 1 - Mechanical resistance and stability*

and

*BWR 2 - Safety in case of fire*

are listed in:

*ETA-20/0446*; Annex C and *ETA-17/1009*; Annex C.

#### **Constructional data**

The table shows the minimum and maximum values of the available concrete screw range. Detailed values for each screw size can be found in *ETA-20/0446* and *ETA-17/1009*.

Name	Value	Unit
Usage category as per ETA	ETA-20/0446 and ETA-17/1009	-
Nominal diameter min. dnom	6	mm
Nominal diameter max. dnom	14	mm
Thread outer diameter min. dth	7.45	mm
Thread outer diameter max. dth	16.55	mm
Drill hole depth min. h1	45	mm
Nominal embedment depth min. hnom	35	mm

Performance data of the product in accordance with the declaration of performance with respect to its essential characteristics according to:

*ETA-20/0446 'Concrete screws for use in cracked and non-cracked concrete' acc. to EAD 330232*

*ETA-17/1009 'Concrete screws for multiple-use for non-structural application in concrete and in pre-stressed hollow core slabs' acc. to EAD 330747*

#### **2.4 Delivery status**

Depending on the type of concrete screws and customer requirements, the items are supplied as individual components. The packaging units vary in a range from 25 to 500 pcs.

#### **2.5 Base materials/Ancillary materials**

The main raw materials and primary products for the concrete screws of EJOT SE & Co. KG is carbon steel.

1) 'This product/article/at least one partial article contains substances listed in the *candidate list* (date: 21.01.2025) exceeding 0.1 percentage by mass: no'.

2) 'This product/article/at least one partial article contains other carcinogenic, mutagenic, reprotoxic (CMR) substances in categories 1A or 1B which are not on the *candidate list*, exceeding 0.1 percentage by mass: no'

3) 'Biocide products were added to this construction product or it has been treated with biocide products (this then concerns a treated product as defined by the *(EU) Ordinance on Biocide Products No. 528/2012*): no'

## 2.6 Manufacture

For the production of concrete screws, the following manufacturing process is mainly used:

The cold or hot extrusion process on a multi-stage press. The raw material is delivered as wire wound on spools and is uncoiled and straightened in the upstream equipment. Modern cold or hot formers work in multiple stages, i.e. several operations are carried out in succession in one stroke, for example shearing of the blank, preforming of the screw head, final upsetting, deburring and reducing of the threaded part. In the following process, the thread is produced without cutting using a thread rolling machine. Between each of the operations, the parts are cleaned in an appropriately designed washing line. Finally, the surfaces of the screws are galvanized or multilayer coated.

## 2.7 Environment and health during manufacturing

The steels and production materials used for the manufacture of concrete screws are non-toxic and have no impact on humans and the environment or aquatic and terrestrial organisms. The vapours produced during the manufacturing process of the concrete screws are removed from the production sites by appropriate filter systems and ventilation systems and cleaned by filter systems. Strict safety regulations apply in the EJOT production sites, e.g. wearing suitable work clothing as well as hearing protection. These preventive measures serve to minimise risks and prevent occupational accidents.


Strict safety and risk reduction measures are observed in the EJOT production facilities. EJOT SE & Co. KG is certified according to *ISO 14001* environmental management systems (certificate - registration number 302825 UM).

## 2.8 Product processing/Installation

The installation of the concrete screws must be carried out acc. to the provisions of:

*ETA-20/0446*; Annex B and *ETA-17/1009*; Annex B

The setting process is shown as an example in the following figure:

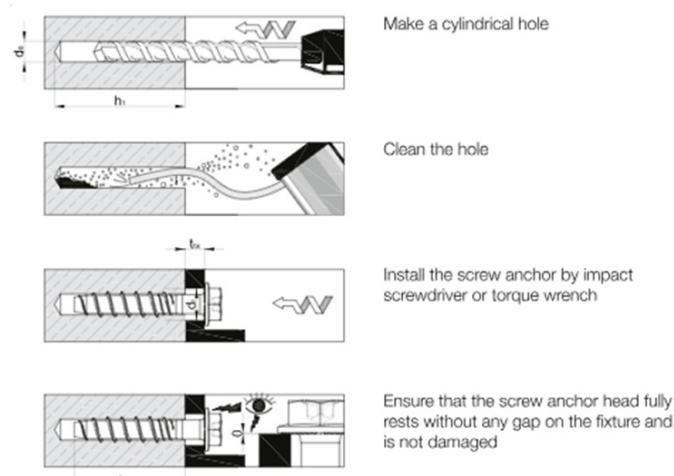

## 2.9 Packaging

## 3. LCA: Calculation rules

### 3.1 Declared Unit

The declared unit is 1 kg of concrete screws EJOT JC2 Plus/Sormat S-CSA+. A production-weighted average was created.

Cartons in the article and quantity-specific dimensions are used for packaging. Transport to the customer is stacked on wooden pallets that are reused as circulation pallets.

### 2.10 Condition of use

No material change is expected for the screws during use.

### 2.11 Environment and health during use

No negative effects on the environment or human health are known from concrete screws in the installed state.

### 2.12 Reference service life

The assumed service life of concrete screws is 50 years based on *EAD 330232* and *EAD 330747*. According to *ETA-20/0446* and *ETA-17/1009*, no warranty claims can be derived from this service life. This information is only to be regarded as an aid to selecting the correct product with regard to the economically appropriate service life of the structure.

### 2.13 Extraordinary effects

#### Fire

Concrete screws meet the requirements of fire resistance class A1 and may be classified in resistance class A1 without testing in accordance with *European Commission Decision 96/603/EC*. In the area of fire protection, the following building material class according to *EN 13501-1* is complied with:

#### Fire protection

Name	Value
Building material class	A1

Design under fire exposure is performed according to the design method given in *EN 1992-4*.

Characteristic resistances under tension loads in case of fire acc. to *ETA-20/0446*; Table C3 and C4.

#### Water

Water usually has no effect on concrete screws, as these are made of carbon steel with a surface coating (galvanisation).

#### Mechanical destruction

The mechanical destruction of concrete screws has no impact on the environment.

### 2.14 Re-use phase

Concrete screws can generally be dismantled again from all applications and thus be fed into the recycling process. Direct reuse for structural applications is not recommended. German 'General construction technique permit AbG Z-21.8-2136 - Screw anchor for temporary fastening in concrete' allows re-use under defined, limited provisions within chapter 2.

### 2.15 Disposal

Concrete screws can be disposed of separately (by appropriate dismantling) or directly with the installed elements during demolition. These are fed into the recycling process in accordance with the applicable disposal guidelines. The waste code for screws made of carbon steel is *EWC 170405*.

### 2.16 Further information

Further information can be found at [www.ejot.com](http://www.ejot.com) or in the ETAs, approvals, standards and specialist rules and installation guidelines already mentioned.

**Declared unit and mass reference**

Name	Value	Unit
Declared unit	1	kg
Gross density	7850	kg/m <sup>3</sup>

**3.2 System boundary**

Type of the EPD: cradle to gate - with options

**Module A1–A3**

The product stage includes the provision of materials (steel and packaging materials) as well as the associated transportation to the manufacturing site. Furthermore, electric energy required for the manufacturing process as well as the treatment of production waste until the end-of-waste status is reached, are accounted for.

For the environmental impact, the use of green electricity was calculated, taking into account the residual electricity mix for the remaining electricity. The proportion of the electricity demand covered by green electricity in the total electricity demand is 100 %. GWP-total of the dataset used for electricity is 0.03 kg CO<sub>2</sub>eq/kWh.

**Module A5**

Module A5 includes the treatment of packaging materials until end-of-waste status is reached.

It is assumed that the associated impacts from installation are negligible, which means that no environmental impacts from the installation of the products are declared.

**Modules C1–C4**

Module C1 describes the expenses after the product's end of life for dismantling or demolition of the product from the building. It is assumed that the associated impacts are negligible, which means that no environmental impacts from the dismantling are declared.

Transport to waste treatment is considered in module C2.

Module C3 contains the necessary processes for waste treatment at the end of the product life cycle. Emissions for waste sorting are assigned to module C3. End-of-waste for steel scrap is assumed after transportation to and sorting at a recycling plant. Resulting substitution potentials for a next product system are accounted for in module D.

Module C4 describes the expenses for the disposal of the product or its components if material or energy recovery or reuse is not possible. Since material recycling is assumed, no processes are modelled in module C4.

**Module D**

The output flows or secondary materials resulting from the waste treatment in A5 and C3, which can potentially serve as material input (recycling) for another product system, are declared in Module D.

**3.3 Estimates and assumptions**

For transport to waste processing (modules A3, A5 and C2), 100 km truck with 50 % utilisation was modelled.

Transport from to warehouse in Germany was modelled, using a combined route of truck and ship.

Recycled content was modelled according to the background datasets.

**3.4 Cut-off criteria**

Wooden pallets were not considered. The impact is considered neglectable since they are reused multiple times.

It can be assumed that the cut-off criteria for considering the use of primary energy and mass according to EN 15804+A2 (<1 % in each case, <5 % in total per declared module) were observed.

Capital goods are not considered.

**3.5 Background data**

For the background data, *Managed LCA Content* (Content Version 2024.2) was used.

**3.6 Data quality**

The primary data was provided by EJOT SE & Co. KG and checked for plausibility. The quality and representativeness of the foreground data collected can therefore be regarded as high.

The data quality of the background data used was rated as good in terms of technical, geographical and temporal representativeness. The majority of the background data used has the reference year 2023.

The potential environmental impacts result largely from the purchased materials and therefore the background data.

**3.7 Period under review**

Data was collected for the year 2023.

**3.8 Geographic Representativeness**

Land or region, in which the declared product system is manufactured, used or handled at the end of the product's lifespan: Europe

**3.9 Allocation**
**Allocation of energy, auxiliary and operating materials used for individual products in a factory**

Inputs could be clearly assigned to the products under consideration.

**Allocation of co-production processes**

Steel scrap from production (modules A1-A3) is treated as a co-product and the economic value is set to 0. Therefore, all impacts from production are assigned to the declared unit.

**Allocation in the use of recycled and/or secondary raw materials**

For the input of secondary material, the cut-off method is applied. Therefore, secondary materials enter the system under consideration without any environmental loads. This applies to steel and waste paper for cardboard production in modules A1-A3.

**Allocation method for re-use, recycling and recovery**

Waste processing of materials flows is modelled until the end-of-waste status is reached. The loads of waste processing are accounted for in the module where the waste occurs (A1-A3, A5 and C3).

Substitution potentials are declared in modules D. For materials only the net flows are considered to ensure consistency with the cut-off method.

**3.10 Comparability**

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and the building context, respectively the product-specific characteristics of performance, are taken into account. For the background data, *Managed LCA Content* (Content Version 2024.2) was used.

#### 4. LCA: Scenarios and additional technical information

##### Characteristic product properties of biogenic carbon

##### Information on describing the biogenic carbon content at factory gate

Name	Value	Unit
Biogenic carbon content in product	-	kg C
Biogenic carbon content in accompanying packaging	0.015	kg C

Note: 1 kg of biogenic carbon is equivalent to 44/12 kg of CO<sub>2</sub>.

##### Assembly (A5)

Name	Value	Unit
Output substances following waste treatment on site	0.039	kg

##### End of life (C1-C4)

Name	Value	Unit
Collected separately waste type steel	1	kg
Recycling	1	kg

##### Reuse, recovery and/or recycling potentials (D), relevant scenario information

Name	Value	Unit
Net Scrap	-0.086	kg

## 5. LCA: Results

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

Product stage			Construction process stage		Use stage						End of life stage			Benefits and loads beyond the system boundaries		
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	X	MND	MND	MNR	MNR	MNR	MND	MND	X	X	X	X	X

### RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 kg EJOT JC2 Plus / Sormat S-CSA+

Parameter	Unit	A1-A3	A5	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> eq	1.17E+00	6.46E-02	0	1.07E-02	1.46E-02	0	1.47E-01
GWP-fossil	kg CO <sub>2</sub> eq	1.21E+00	7.59E-03	0	1.05E-02	1.44E-02	0	1.47E-01
GWP-biogenic	kg CO <sub>2</sub> eq	-4.91E-02	5.7E-02	0	3.24E-05	1.09E-04	0	-4.52E-05
GWP-luluc	kg CO <sub>2</sub> eq	2.92E-03	1.6E-05	0	1.71E-04	9.02E-05	0	1.96E-05
ODP	kg CFC11 eq	1.29E-10	8.6E-15	0	1.5E-15	2.04E-13	0	-2.26E-13
AP	mol H <sup>+</sup> eq	3.76E-03	5.6E-06	0	4.34E-05	4.58E-05	0	3.63E-04
EP-freshwater	kg P eq	5.63E-06	5.62E-09	0	4.35E-08	5.98E-08	0	3.01E-08
EP-marine	kg N eq	1.36E-03	2.35E-06	0	2.06E-05	1.81E-05	0	5.78E-05
EP-terrestrial	mol N eq	1.48E-02	2.76E-05	0	2.3E-04	1.99E-04	0	5.16E-04
POCP	kg NMVOC eq	3.62E-03	5.02E-06	0	4.12E-05	4.1E-05	0	2.36E-04
ADPE	kg Sb eq	5.37E-06	1.53E-10	0	8.88E-10	2.14E-09	0	8.46E-07
ADPF	MJ	1.82E+01	2.08E-02	0	1.34E-01	2.58E-01	0	1.44E+00
WDP	m <sup>3</sup> world eq deprived	1.34E-01	6.92E-04	0	1.58E-04	2.56E-03	0	9.77E-03

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources; WDP = Water (user) deprivation potential)

### RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 kg EJOT JC2 Plus / Sormat S-CSA+

Parameter	Unit	A1-A3	A5	C1	C2	C3	C4	D
PERE	MJ	3.22E+01	7.47E-02	0	1.16E-02	1.42E-01	0	-7.55E-02
PERM	MJ	6.8E-02	-6.8E-02	0	0	0	0	0
PERT	MJ	3.23E+01	6.72E-03	0	1.16E-02	1.42E-01	0	-7.55E-02
PENRE	MJ	1.81E+01	9.28E-02	0	1.34E-01	2.58E-01	0	1.44E+00
PENRM	MJ	7.2E-02	-7.2E-02	0	0	0	0	0
PENRT	MJ	1.82E+01	2.08E-02	0	1.34E-01	2.58E-01	0	1.44E+00
SM	kg	1.12E+00	0	0	0	0	0	-8.6E-02
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	7.53E-03	1.89E-05	0	1.29E-05	1.11E-04	0	1.51E-02

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

### RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2: 1 kg EJOT JC2 Plus / Sormat S-CSA+

Parameter	Unit	A1-A3	A5	C1	C2	C3	C4	D
HWD	kg	1.1E-07	1.18E-11	0	5.14E-12	2.74E-10	0	1.11E-08
NHWD	kg	6.94E-02	3.31E-05	0	2.19E-05	1.66E-04	0	-1.8E-02
RWD	kg	8.28E-04	1.27E-06	0	2.45E-07	3.02E-05	0	-3.89E-06
CRU	kg	0	0	0	0	0	0	0
MFR	kg	0	3.8E-02	0	0	1E+00	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	1.34E-02	0	0	0	0	0
EET	MJ	0	2.38E-02	0	0	0	0	0

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

### RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional: 1 kg EJOT JC2 Plus / Sormat S-CSA+

Parameter	Unit	A1-A3	A5	C1	C2	C3	C4	D
PM	Disease incidence	ND	ND	ND	ND	ND	ND	ND
IR	kBq U235 eq	ND	ND	ND	ND	ND	ND	ND
ETP-fw	CTUe	ND	ND	ND	ND	ND	ND	ND
HTP-c	CTUh	ND	ND	ND	ND	ND	ND	ND
HTP-nc	CTUh	ND	ND	ND	ND	ND	ND	ND
SQP	SQP	ND	ND	ND	ND	ND	ND	ND


PM = Potential incidence of disease due to PM emissions; IR = Potential Human exposure efficiency relative to U235; ETP-fw = Potential comparative Toxic Unit for ecosystems; HTP-c = Potential comparative Toxic Unit for humans (cancerogenic); HTP-nc = Potential comparative Toxic Unit for humans (not cancerogenic); SQP = Potential soil quality index

Disclaimer – for the indicators 'abiotic depletion potential for non-fossil resources', 'abiotic depletion potential for fossil resources', 'water (user) deprivation potential, deprivation-weighted water consumption'. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high as there is limited experience with the indicator.

Note: The results for the optional additional impact categories according to EN 15804+A2 are not declared since uncertainties on these results are high.

## 6. LCA: Interpretation

### Dominance analysis

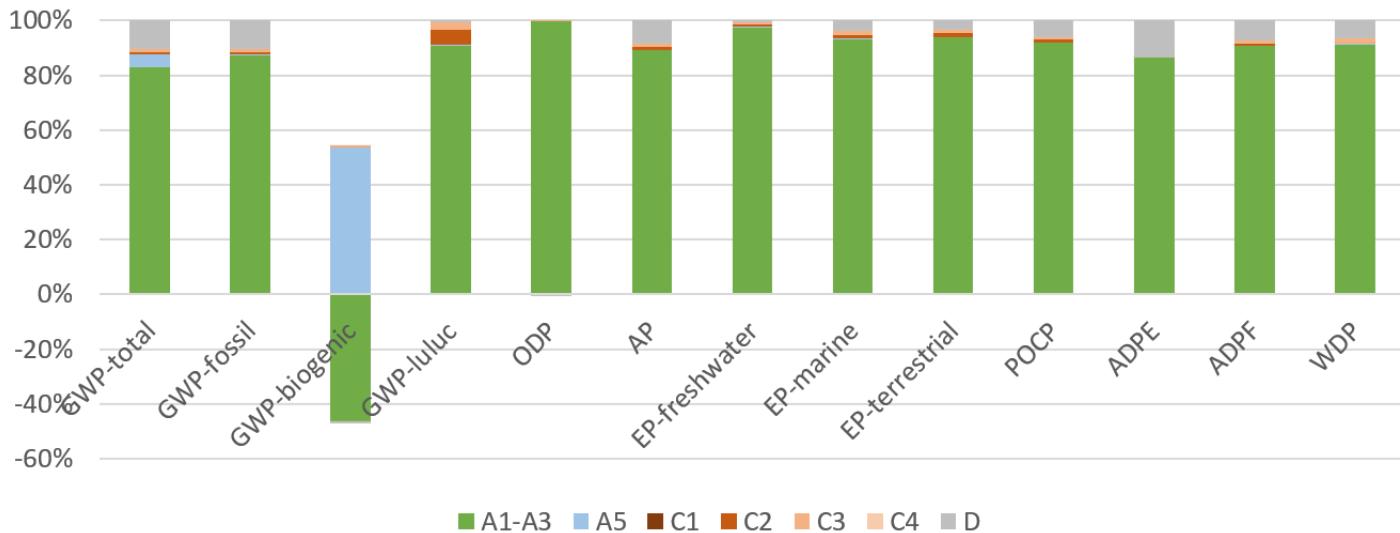

The figure above shows the dominance analysis across the declared modules.

It can be seen that the production phase (modules A1-A3) is dominant for most of the declared indicators.

Module A5 has a significant impact on the indicator GWP-biogenic since the biogenic carbon that is stored in the cardboard packaging is leaving the system in this module.

Within module A1-A3, the production of steel as raw material dominates the results of most of the environmental impact indicators, followed by surface treatment. Transportation is relevant for the indicator GWP-luluc and electricity for ODP.

No significant variability in the LCA results for different concrete screws is to be expected.

## 7. Requisite evidence

Not relevant

## 8. References

### Standards

#### EN 206

EN 206:2013+A2:2021, Concrete – Specification, performance, production and conformity.

#### EN 13501-1

EN 13501-1, Fire classification of construction products and building elements – Part 1: Classification using data from reaction to fire tests.

**EN 15804**

EN 15804:2012+A2:2019+AC:2021, Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products.

**EN 1992-4**

EN 1992-4, Eurocode 2 – Design of concrete structures – Part 4: Design of fastenings for use in concrete.

**EAD 330232**

EAD 330232, Mechanical fasteners for use in concrete.

**EAD 330747**

EAD 330747, Fasteners for use in concrete for redundant non-structural systems.

**ISO 14001**

ISO 14001:2015, Environmental management systems – Requirements with guidance for use.

**ISO 14025**

EN ISO 14025:2011, Environmental labels and declarations — Type III environmental declarations — Principles and procedures.

**ISO 14040**

ISO 14040:2006, Environmental management — Life cycle assessment — Principles and framework.

**ISO 14044**

ISO 14044:2006, Environmental management — Life cycle assessment — Requirements and guidelines.

**Further references****AbG Z-21.8-2136**

Allgemeines bauaufsichtliches Gutachten (AbG) Z-21.8-2136 – Screw anchor for temporary fastening in concrete. Berlin: Deutsches Institut für Bautechnik.

**BWR 1**

BWR 1 – Mechanical resistance and stability.

**BWR 2**

BWR 2 – Safety in case of fire.

**Candidate List**

Candidate List of Substances of Very High Concern for Authorisation (ECHA Candidate List), dated 21.01.2025, published in accordance with Article 59(10) of the REACH Regulation. Helsinki: European Chemicals Agency.

**ETA-17/1009**

ETA-17/1009: Concrete screw for multiple use for non-structural application in concrete and pre-stressed hollow core slabs

**ETA-20/0446**

ETA-20/0446: Concrete screw for use in cracked and non-cracked concrete

**EWC**

European Waste Catalogue, Waste Catalogue Ordinance of 10 December 2001 (Federal Law Gazette I page 3379), which was last amended by Article 3 of the Ordinance of 17 July 2017 (Federal Law Gazette I page 2644).

**European Commission Decision 96/603/EC**

European Commission Decision 96/603/EC of 4 October 1996 establishing the list of products belonging to Classes A 'No contribution to fire' provided for in the decision 94/611/EC.

**IBU 2022**

Institut Bauen und Umwelt e.V.: General Instructions for the EPD programme of Institut Bauen und Umwelt e.V., Version 2.1. Berlin: Institut Bauen und Umwelt e.V., 2022. [www.ibu-epd.com](http://www.ibu-epd.com)

**Managed LCA Content**

Managed LCA Content. Content Version 2024.2. Leinfelden-Echterdingen: Sphera Solutions GmbH.

**PCR Part A**

Product Category Rules for Building-Related Products and Services. Part A: Calculation rules for the life cycle assessment and requirements for the project report, Version 1.4. Berlin: Institut Bauen und Umwelt e.V. (ed.), 15.04.2024.

**PCR: Screws**

PCR guidance texts for building-related products and services. Part B: Requirements on the EPD for Screws. Berlin: Institut Bauen und Umwelt e.V. (ed.), PCR v8, 10.07.2023.

**Regulation (EU) No. 305/2011 (CPR)**

Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC Text with EEA relevance

**Regulation (EU) Ordinance on Biocide Products No. 528/2012**

Regulation (EU) No 528/2012 of the European Parliament and of the Council of 22 May 2012 concerning the making available on the market and use of biocidal products Text with EEA relevance

**Publisher**

Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

+49 (0)30 3087748- 0  
info@ibu-epd.com  
www.ibu-epd.com

**Programme holder**

Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

+49 (0)30 3087748- 0  
info@ibu-epd.com  
www.ibu-epd.com

**Author of the Life Cycle Assessment**

brands & values GmbH  
Hollerallee 14A  
28209 Bremen  
Germany

+49 421 70 90 84 33  
info@brandsandvalues.com  
www.brandsandvalues.com

**Owner of the Declaration**

EJOT SE & Co. KG  
In der Stockwiese 35  
57334 Bad Laasphe  
Germany

+49 2752 9080  
construction@ejot.com  
www.ejot.de